




# RM12N

## miniature relays



- DC coils - of up to 24 V DC, low coil power 0,22 ... 0,29 W
- For PCB
- Small dimensions, light weight
- Applications: for household electrical appliance, automation systems, electrical equipment, instrument and meter, telecommunication devices, remote control facilities
- Recognitions, certifications, directives: RoHS,   

### Contact data

|                                |            |                                                                                                   |
|--------------------------------|------------|---------------------------------------------------------------------------------------------------|
| Number and type of contacts    |            | 1 CO, 1 NO                                                                                        |
| Contact material               |            | <b>AgNi</b> , AgNi/Au gold plating, AgSnO <sub>2</sub> , AgSnO <sub>2</sub> /Au gold plating      |
| Rated / max. switching voltage | AC         | 250 V / 440 V                                                                                     |
| Min. switching voltage         |            | 6 V                                                                                               |
| Rated load                     | AC1<br>DC1 | 1 CO: 8 A / 250 V AC<br>1 CO: 8 A / 30 V DC<br>1 NO: 10 A / 250 V AC<br>1 NO: 10 A / 30 V DC      |
| Min. switching current         |            | 100 mA AgNi, AgSnO <sub>2</sub> , 50 mA AgNi/Au gold plating, AgSnO <sub>2</sub> /Au gold plating |
| Rated current                  |            | 8 A / 250 V AC, 10 A / 30 V DC                                                                    |
| Max. breaking capacity         | AC1        | 2 500 VA                                                                                          |
| Contact resistance             |            | ≤ 100 mΩ                                                                                          |

### Coil data

|                                   |    |                           |
|-----------------------------------|----|---------------------------|
| Rated voltage                     | DC | 5, 6, 9, 12, 18, 24, 48 V |
| Must release voltage              |    | DC: ≥ 0,1 U <sub>n</sub>  |
| Operating range of supply voltage |    | see Table 1               |
| Rated power consumption           | DC | 0,22 ... 0,29 W           |

### Insulation according to EN 60664-1

|                             |  |            |                                        |
|-----------------------------|--|------------|----------------------------------------|
| Insulation resistance       |  | > 1 000 MΩ | 500 V DC, 60 s                         |
| Dielectric strength         |  |            |                                        |
| • between coil and contacts |  | 5 000 V AC | type of insulation: reinforced         |
| • contact clearance         |  | 1 000 V AC | type of clearance: micro-disconnection |
| Contact - coil distance     |  |            |                                        |
| • clearance                 |  | ≥ 8 mm     |                                        |
| • creepage                  |  | ≥ 8 mm     |                                        |

### General data


|                                                        |                    |                                                                         |                |
|--------------------------------------------------------|--------------------|-------------------------------------------------------------------------|----------------|
| Operating / release time (typical values)              |                    | 10 ms / 5 ms                                                            |                |
| Electrical life (number of cycles)                     |                    |                                                                         |                |
| • resistive AC1                                        | 1 800 cycles/hour  | 10 <sup>5</sup>                                                         | 10 A, 250 V AC |
| • resistive DC1                                        | 1 800 cycles/hour  | 10 <sup>5</sup>                                                         | 10 A, 30 V DC  |
| Mechanical life                                        | 18 000 cycles/hour | 10 <sup>7</sup>                                                         |                |
| Dimensions (L x W x H)                                 |                    | 28,5 x 10,1 x 12,5 mm                                                   |                |
| Weight                                                 |                    | 8 g                                                                     |                |
| Ambient temperature<br>(non-condensation and/or icing) | • operating        | -40...+85 °C                                                            |                |
| Cover protection category                              |                    | IP 40 or <b>IP 67</b>                                                   | EN 60529       |
| Environmental protection                               |                    | RTII or <b>RTIII</b>                                                    | EN 61810-7     |
| Shock resistance                                       |                    | 10 g                                                                    |                |
| Vibration resistance                                   |                    | 1 NO: 1,65 mm (double amplitude)<br>1 NC: 0,8 mm (without coil voltage) | 10...55 Hz     |
| Solder bath temperature                                |                    | max. 260 °C                                                             |                |
| Soldering time                                         |                    | max. 5 s                                                                |                |

The data in bold type relate to the standard versions of the relays.


# RM12N

miniature relays


## Dimensions

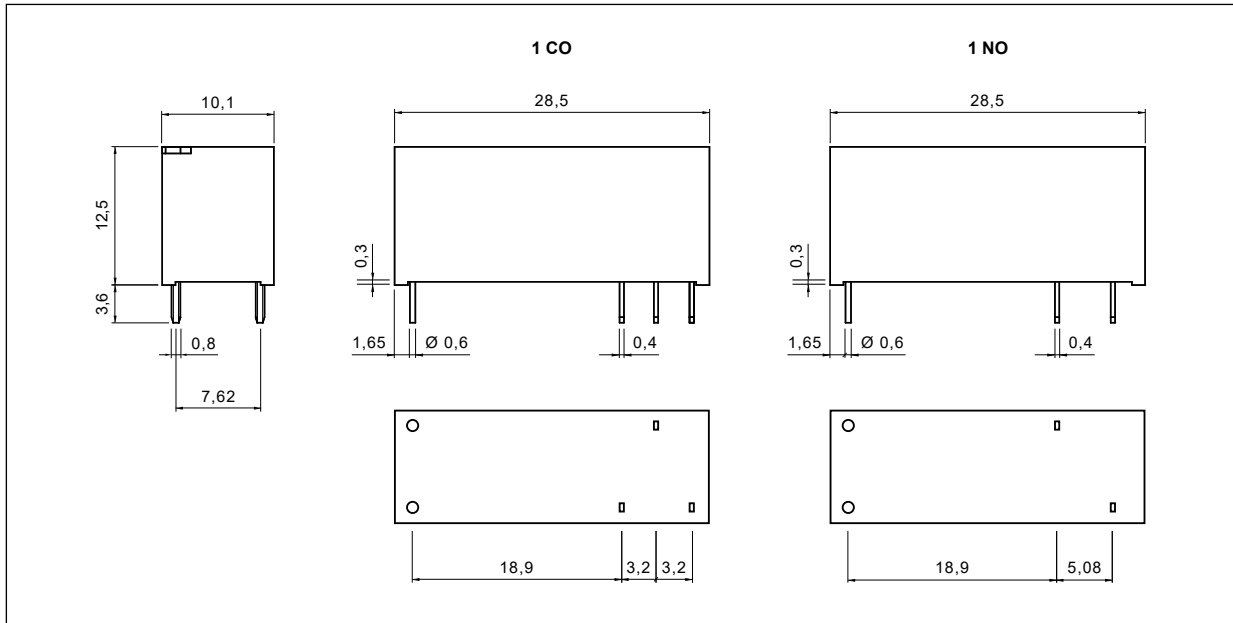

## Connection diagrams (pin side view)

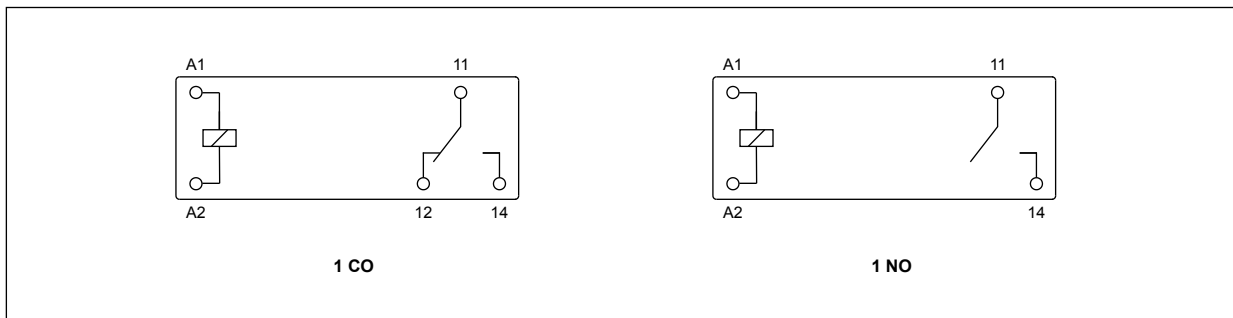

## Pinout (solder side view)

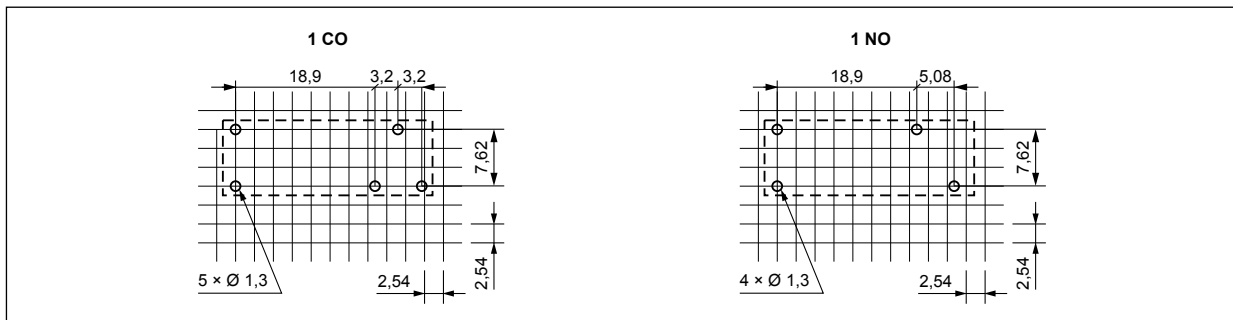

## Mounting

Relays **RM12N** are designed for direct PCB mounting.

# RM12N


## miniature relays

Coil data - DC voltage version

Table 1

| Coil code | Rated voltage<br>V DC | Coil resistance<br>at 20 °C<br>$\Omega$ | Acceptable<br>resistance | Coil operating range<br>V DC |                 |
|-----------|-----------------------|-----------------------------------------|--------------------------|------------------------------|-----------------|
|           |                       |                                         |                          | min. (at 20 °C)              | max. (at 20 °C) |
| 1005      | 5                     | 113                                     | $\pm 10\%$               | 3,5                          | 6,5             |
| 1006      | 6                     | 164                                     | $\pm 10\%$               | 4,2                          | 7,8             |
| 1009      | 9                     | 360                                     | $\pm 10\%$               | 6,3                          | 11,7            |
| 1012      | 12                    | 620                                     | $\pm 10\%$               | 8,4                          | 15,6            |
| 1018      | 18                    | 1 295                                   | $\pm 10\%$               | 12,7                         | 23,4            |
| 1024      | 24                    | 2 350                                   | $\pm 10\%$               | 16,8                         | 31,2            |
| 1048      | 48                    | 8 000                                   | $\pm 10\%$               | 33,6                         | 62,4            |

### Ordering codes

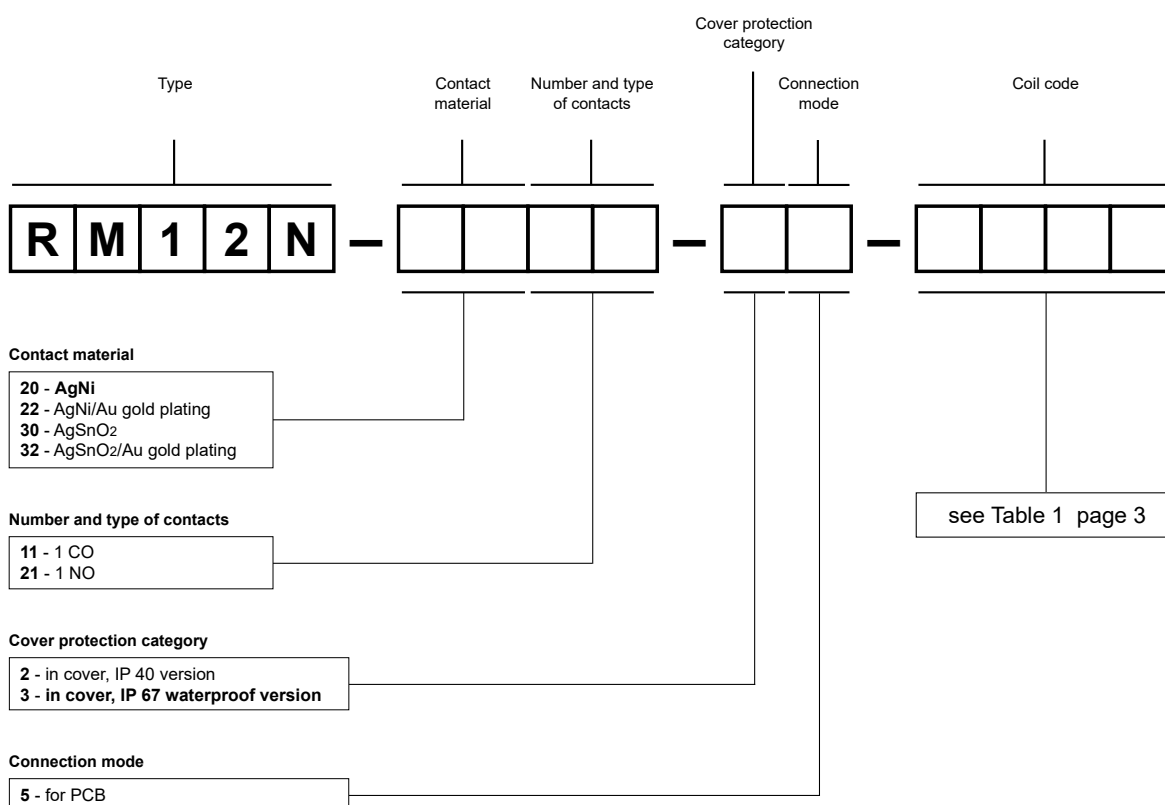

Examples of ordering codes:

**RM12N-2011-35-1012**

relay **RM12N**, for PCB, one changeover contact, contact material AgNi, coil voltage 12 V DC, in cover IP 67

**RM12N-3021-25-1024**

relay **RM12N**, for PCB, one normally open contact, contact material AgSnO<sub>2</sub>, coil voltage 24 V DC, in cover IP 40

#### PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.