

STAR COMPLET

Boxes for industrial sockets

Boxes with assembled and wired power sockets (without protections)



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV4PK2	1x6 DIN rail	1.23	2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP54.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV4100	1x6 DIN rail	1.50	4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP54.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG								
SV6302	1x6 DIN rail	1.53	1	Sloping flush-fit socket	44	3P+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230
40269	1x6 DIN rail	1.60	1	Sloping flush-fit socket	44	3P+N+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP44.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG								
							(A)	(V)
SV6305	1x6 DIN rail	1.64	1	Sloping flush-fit socket	44	3P+E	32	400
			2	Schuko-type sockets	54	2P+E	16	230
40270	1x6 DIN rail	1.72	1	Sloping flush-fit socket	44	3P+N+E	32	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP44.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG								
SV9301	1x9 DIN rail	2.09	2	Sloping flush-fit sockets	44	3P+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230
40298	1x9 DIN rail	2.22	2	Sloping flush-fit sockets	44	3P+N+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x210x137 mm.

TYPE: 65TC09 - IP44.

Boxes with assembled and wired power sockets (without protections)



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG								
SV9302	1x9 DIN rail	2.19	1	Sloping flush-fit socket	44	3P+E	16	400
			1	Sloping flush-fit socket	44	3P+E	32	400
			2	Schuko-type sockets	54	2P+E	16	230
40299	1x9 DIN rail	2.34	1	Sloping flush-fit socket	44	3P+N+E	16	400
			1	Sloping flush-fit socket	44	3P+N+E	32	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x210x137 mm.

TYPE: 65TC09 - IP44.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV9100	1x9 DIN rail	2.44	9	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x210x137 mm.

TYPE: 65TC09 - IP54.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG			(A) (V)					
SV12100	1x12 DIN rail	2.60	2	Sloping flush-fit sockets	44	3P+E	16	400
			4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x310x147 mm.

TYPE: 65TC12 - IP44.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG								
SV12300	1x12 DIN rail	2.97	1	Sloping flush-fit socket	44	3P+E	32	400
			1	Sloping flush-fit socket	44	3P+E	16	400
			4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x310x147 mm.

TYPE: 65TC12 - IP44.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG								
SV12301	1x12 DIN rail	3.03	1	Sloping flush-fit socket	44	3P+E	32	400
			2	Sloping flush-fit sockets	44	3P+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x310x147 mm.

TYPE: 65TC12 - IP44.

STAR COMPLET

Boxes for industrial sockets

Boxes with assembled and wired power sockets (without protections)



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG			(A) (V)					
SV12302	1x12 DIN rail	3.11	2	Sloping flush-fit sockets	44	3P+E	32	400
			4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x310x147 mm.

TYPE: 65TC12 - IP44.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG			(A) (V)					
SV18303	1x18 DIN rail	4.08	3	Sloping flush-fit sockets	44	2P+E	16	230
			3	Sloping flush-fit sockets	44	3P+E	32	400

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x418x147 mm.

TYPE: 65TC18 - IP44.



Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG			(A) (V)					
SV18100	1x18 DIN rail	4.00	1	Sloping flush-fit socket	44	3P+E	16	400
			1	Sloping flush-fit socket	44	3P+N+E	16	400
			1	Sloping flush-fit socket	44	3P+E	32	400
			1	Sloping flush-fit socket	44	3P+N+E	32	400
			4	Schuko-type socket	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x418x147 mm.

TYPE: 65TC18 - IP44.

Boxes with assembled and wired power sockets (with protections)




Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG						
SV4PK2/P	1x6 DIN rail	1.76	2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP54.




Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV4100/P	1x6 DIN rail	2.03	4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP54.

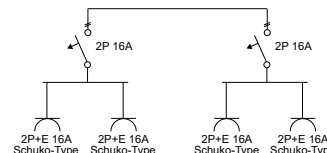


Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV6302/P	1x6 DIN rail	2.16	1	Sloping flush-fit socket	44	3P+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP44.




Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
			KG					
SV6305/P	1x6 DIN rail	3.00	1	Sloping flush-fit socket	44	3P+E	32	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x142x137 mm.

TYPE: 65TC06 - IP44.




Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV9301/P	1x9 DIN rail	2.80	2	Sloping flush-fit sockets	44	3P+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x210x137 mm.

TYPE: 65TC09 - IP44.

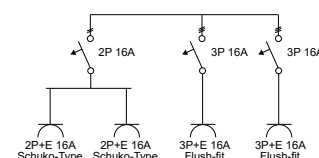

STAR COMPLET


Boxes for industrial sockets

Boxes with assembled and wired power sockets (with protections)




Reference No.	No módulos	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG			(A) (V)					
SV9302/P	1x9 DIN rail	3.19	1	Sloping flush-fit socket	44	3P+E	16	400
			1	Sloping flush-fit socket	44	3P+E	32	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.
DIMENSIONS: 436x210x137 mm.
TYPE: 65TC09 - IP44.

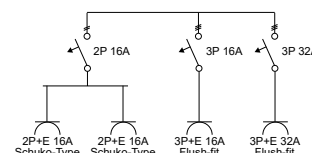


Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV9100/P	1x9 DIN rail	3.50	9	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.
DIMENSIONS: 436x210x137 mm.
TYPE: 65TC09 - IP54

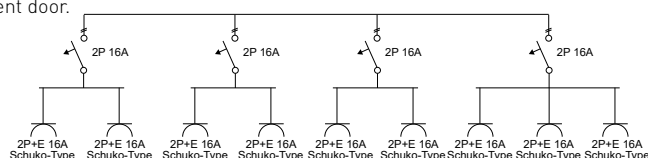


Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
		KG					(A)	(V)
SV9101/P	1x9 DIN rail	3.69	1	Sloping flush-fit socket	44	3P+N+E	16	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.
DIMENSIONS: 436x210x137 mm.
TYPE: 65TC09 - IP44.




Reference No.	No. of modules	Weight	Components						
			No.	Description	IP	Poles	I	Voltage	
KG								(A)	(V)
SV12100/P	1x12 DIN rail	4.17	2	Sloping flush-fit sockets	44	3P+E	16	400	
			4	Schuko-type sockets	54	2P+E	16	230	

FINISH: Grey RAL 7035 with transparent door.
DIMENSIONS: 436x310x147 mm.
TYPE: 65TC12 - IP44.

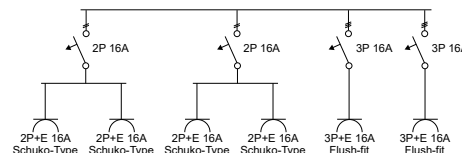

Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I	Voltage
KG			(A) (V)					
SV12300/P	1x12 DIN rail	4.30	1	Sloping flush-fit socket	44	3P+E	16	400
			1	Sloping flush-fit socket	44	3P+E	32	400
			4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.
DIMENSIONS: 436x310x147 mm.
TYPE: 65TC12 - IP44.

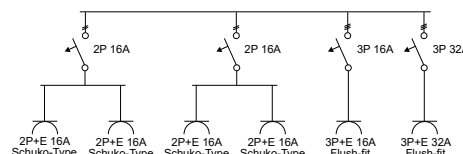

Boxes with assembled and wired power sockets (without protections)




Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I (A)	Voltage (V)
SV12301/P	1x12 DIN rail	4.44	2	Sloping flush-fit sockets	44	3P+E	16	400
			1	Sloping flush-fit socket	44	3P+E	32	400
			2	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x310x147 mm.

TYPE: 65TC12 - IP44.

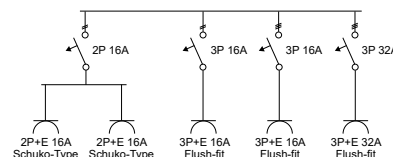


Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I (A)	Voltage (V)
SV12302/P	1x12 DIN rail	4.42	2	Sloping flush-fit sockets	44	3P+E	32	400
			4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x310x147 mm.

TYPE: 65TC12 - IP44.

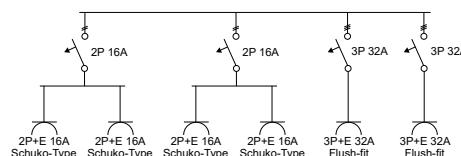


Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I (A)	Voltage (V)
SV18303/P	1x18 DIN rail	5.74	3	Sloping flush-fit sockets	44	2P+E	16	230
			3	Sloping flush-fit sockets	54	3P+E	32	400

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x418x147 mm.

TYPE: 65TC18 - IP44.

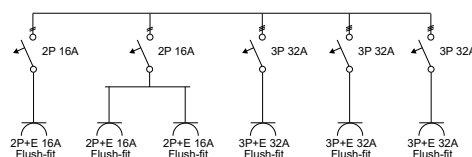

Reference No.	No. of modules	Weight	Components					
			No.	Description	IP	Poles	I (A)	Voltage (V)
SV18100/P	1x18 DIN rail	6.80	1	Sloping flush-fit socket	44	3P+E	16	400
			1	Sloping flush-fit socket	44	3P+N+E	16	400
			1	Sloping flush-fit socket	44	3P+E	32	400
			1	Sloping flush-fit socket	44	3P+N+E	32	400
			4	Schuko-type sockets	54	2P+E	16	230

FINISH: Grey RAL 7035 with transparent door.

DIMENSIONS: 436x418x147 mm.

TYPE: 65TC18 - IP44.

